



Locks for steel doors



Cylinder electric rim locks - elettriKa	145
Booster, Booster plus, Coil set Bticino, microswitch device for elettriKa rim locks	146
Cylinder electric rim locks	147
Cylinder rim locks for gates and up-and-over doors ..	150
Cylinder mortice locks for gates	153
Cylinder mortice locks rolling-shutter and railings	156
Cylinder mortice locks for shutters	157

Cylinder mortice locks.....	158
Cylinder rim locks	161
Multithrow cylinder rim locks.....	162
Cylinder mortice locks.....	163
Double-bit key mortice locks.....	164
Double-bit key mortice locks.....	166
Accessories for metal locks	169
Dimensional drawing.....	177



**Technical features:**

- Painted protective steel case
- Metal striker with stainless steel swinging pin
- Rotary hook deadbolt in extruded aluminium
- 12V ac CE power supply
- Current absorption 3 A
- Non-handed and with a variable backset from 50 to 80 mm

Supplied as standard:

- Striker
- Instruction sheet
- Fixing screws
- 2 spacers for the striker
- 3 keys item 1.01070.10.1

On request:

- Booster device item 1.07022.00.0
- Booster plus device item 1.07022.10.0
- Coil set BTicino device item 1.07025.10.0
- Microswitch device item 1.07023.00.0
- Lighted indicator kit item 1.07126.01.0





Certification:






- ELETTRIKA is certified according to the European standard prEN 14846:06:
Security degree 6 (2,000 Kg lateral push resistance)

Hand:

0 = Non-handed

Elettrika

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
	• Back plate for lock and striker to be welded	 Art. 1 06150 00 0	50÷80	2,710	1	1	1A721 00 0				
	• Galvanized version • Welding plate and striker spacer										
	• Back plate for lock and striker to be welded • Inner push-button • Hold open device	 Art. 1 06150 00 0	50÷80	2,800	1	1	1A731 00 0				
	• Galvanized version • Welding plate and striker spacer • Inside button • Hold-open device • Galvanized protective case										

Type	Description	Unit weight Kg	Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
	- Booster device may be combined with ElettriKa rim lock to have the following function: Door condition signal Electric hold open device Tension adaptor for tension different from 12 V ac (12 Vdc - 24 Vac - 24Vdc) Electrical input reduction Undersized power supply - Supplied as standard: Pin to deactivate hold open catch Fixing screws Instructions sheet t - Please note: Booster device may be combined also with all electric locks (electric striker escluded)	0,085	6	1	07022	00	0	
	- Booster Plus device may be combined with ElettriKa rim lock to have the following function: Electronic opening timer with 5 different options (120 sec default) Door condition signal Electric hold open device Tension adaptor for tension different from 12 V ac (12 Vdc - 24 Vac - 24Vdc) Electrical input reduction Undersized power supply - Supplied as standard: Pin to deactivate hold open catch Fixing screws Instructions sheet - ON REQUEST: Open door indicator item 1.07126.01.0	0,185	1	1	07022	10	0	
	- Coil for Bticino intercommunication system audio swing ref. 344702-03-04 Video intercommunication system video swing ref. 344902-03-04 combined with elettriKa rim lock give door control signal - Supplied as standard: Fixing screws Instructions sheet	0,092	1	1	07025	10	0	
	- Microswitch Give a signal to operate ration motor may be installed directly on the elettriKa rim lock - Supplied as standard: instruction sheet	0,007	6	1	07023	00	0	
	Open door indicator	0,005	1	1	07126	01	0	

**Technical features:**

- Zinc-plated steel case and striker
- Dead-locking latch
- 12 V ac CE
- Current absorption 2,5 A

Supplied as standard:









- Striker
- Instruction sheet
- Fixing screws
- 3 keys item 1.01310.00.1











Certification:





- This electric lock series is certified according to the European standard prEN 14846:06:
-Security degree 3 (500 Kg lateral push resistance and 200 Kg front push resistance)

Hand:

- 1 = R.H. inwards 
- 2 = L.H. inwards 
- 3 = R.H. outwards 
- 4 = L.H. outwards 

Type	Description	Cylinder	Throws	Backset	Unit weight 	 Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
	• Protective back plate • Spacer	 1 02139 00 0	40	2,158	1	1	11521	40	1		
			40	2,165	1	1	11521	40	2		
	• Protective back plate • Spacer • Push-button • Hold-open device	 1 02110 00 0	40	2,152	1	1	11551	40	1		
			40	2,140	1	1	11551	40	2		
	• Protective back plate • Spacer	 1 02139 00 0	50	2,090	1	1	11721	50	1		
			50	2,095	1	1	11721	50	2		
			60	2,091	1	1	11721	60	1		
			60	2,085	1	1	11721	60	2		
			70	2,090	1	1	11721	70	1		
			70	2,090	1	1	11721	70	2		
			80	2,090	1	1	11721	80	1		
			80	2,060	1	1	11721	80	2		
	• Protective back plate • Spacer • Push-button • Hold-open device	 1 02110 00 0	50	2,100	1	1	11731	50	1		
			50	2,103	1	1	11731	50	2		
			60	2,085	1	1	11731	60	1		
			60	2,100	1	1	11731	60	2		
			70	2,100	1	1	11731	70	1		
			70	2,100	1	1	11731	70	2		
			80	2,100	1	1	11731	80	1		
			80	2,085	1	1	11731	80	2		

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
 - Manual throw dead-bolt - Protective back plate - Spacer	 1 02145 00 0	2 50	2,200	1	1	11761 50 1					
		2 50	2,218	1	1	11761 50 2					
		2 60	2,216	1	1	11761 60 1					
		2 60	2,210	1	1	11761 60 2					
		2 70	2,200	1	1	11761 70 1					
		2 70	2,222	1	1	11761 70 2					
		2 80	2,230	1	1	11761 80 1					
		2 80	2,250	1	1	11761 80 2					
 - Manual throw dead-bolt - Protective back plate - Spacer - Push-button	 1 02145 00 0	2 50	2,205	1	1	11771 50 1					
		2 50	2,205	1	1	11771 50 2					
		2 60	2,200	1	1	11771 60 1					
		2 60	2,220	1	1	11771 60 2					
		2 70	2,210	1	1	11771 70 1					
		2 70	2,210	1	1	11771 70 2					
		2 80	2,231	1	1	11771 80 1					
		2 80	2,251	1	1	11771 80 2					
 - For automated and up-and-over gates - Protective back plate	 1 02142 00 0	80	2,100	1	1	11823 80 1					
		80	2,100	1	1	11823 80 2					
 - For automated and up-and-over gates - Protective back plate	 1 02139 00 0	50	1,450	1	1	11921 50 1					
		50	1,450	1	1	11921 50 2					
		60	1,479	1	1	11921 60 1					
		60	1,472	1	1	11921 60 2					
		70	1,472	1	1	11921 70 1					
		70	1,476	1	1	11921 70 2					
		80	1,470	1	1	11921 80 1					
		80	1,475	1	1	11921 80 2					
 - Push-button - Hold-open device	 1 02110 00 0	50	1,475	1	1	11931 50 1					
		50	1,475	1	1	11931 50 2					
		60	1,470	1	1	11931 60 1					
		60	1,472	1	1	11931 60 2					
		70	1,475	1	1	11931 70 1					
		70	1,478	1	1	11931 70 2					
		80	1,470	1	1	11931 80 1					
		80	1,472	1	1	11931 80 2					

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM			
							Type	Dim.	Hand	Pers. Spec.
 • FOR OUTWARD OPENING GATES		 1 02139 00 0	50	1,539	1	1	11921 50 3			
			50	1,538	1	1	11921 50 4			
			60	1,534	1	1	11921 60 3			
			60	1,534	1	1	11921 60 4			
			70	1,533	1	1	11921 70 3			
			70	1,538	1	1	11921 70 4			
			80	1,539	1	1	11921 80 3			
			80	1,534	1	1	11921 80 4			
 • FOR OUTWARD OPENING GATES • Push-button • Hold-open device		 1 02110 00 0	50	1,536	1	1	11931 50 3			
			50	1,530	1	1	11931 50 4			
			60	1,532	1	1	11931 60 3			
			60	1,532	1	1	11931 60 4			
			70	1,530	1	1	11931 70 3			
			70	1,534	1	1	11931 70 4			
			80	1,532	1	1	11931 80 3			
			80	1,532	1	1	11931 80 4			

**Technical features:**

- Zinc-plated steel case
- Steel deadbolts with 25 mm travel (for the series 41600, 41620 and 41650, 24 mm travel)
- Brass cylinder

Supplied as standard:

- 3 keys
- ITEMS 41010 - 41110 - 41111:
 - inside: 1 key item 1.01310.00.2
 - outside: 2 keys item 1.01330.00.1
- ITEMS 41210 - 41220 - 41221 - 41230 - 41231 - 41310 - 41311 - 41320:
 - inside: 1 key item 1.01310.00.2
 - outside: 2 keys item 1.01320.00.1
- ITEMS 41410 - 41420 - 41421:
 - inside: 1 key item 1.01320.00.2
 - outside: 2 keys item 1.01330.00.1

- ITEMS 41510 - 41525 - 41526:

- 2 keys item 1.01060.10.0

- ITEMS 41600 - 41650:

- 2 keys item 1.01070.10.1




- Cylinder fixing screw (series 41620)







Hand:




0 = Non-handed

1 = R.H.

2 = L.H.

Type	Description	Cylinder	L	A	B	S	Throws	Backset	Unit weight Kg	Pieces	ITEM				
											Type	Dim.	Hand	Fin.	Pers. Spec.
	• Central application	1 02544 14 0	160	55	11,5	13,0	2	80	0,508	2	1	41010	80	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,551	2	1	41210	78	0	
		1 02544 15 0	155	55	9,5	17,0	2	78	0,540	2	1	41320	78	0	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,518	2	1	41410	78	0	
	• Lateral application	1 02544 14 0	120	55	11,5	15,0	2	78	0,420	2	1	41110	60	1	
		1 02544 14 0	120	55	11,5	13,0	2	60	0,424	2	1	41110	60	2	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,530	2	1	41220	78	1	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,530	2	1	41220	78	2	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,527	2	1	41230	78	1	
		1 02544 15 0	155	55	6,5	20,0	2	78	0,527	2	1	41230	78	2	
		1 02544 15 0	155	55	9,5	17,0	2	78	0,512	2	1	41310	78	1	
		1 02544 15 0	155	55	9,5	17,0	2	78	0,512	2	1	41310	78	2	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,490	2	1	41420	78	1	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,498	2	1	41420	78	2	
	• Pair of locks with lateral application (1 pc.rh, 1 pc.lh)	1 02544 14 0	120	55	11,5	13,0	2	60	0,848	2	1	41110	60	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	1,060	2	1	41220	78	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	1,054	2	1	41230	78	0	
		1 02544 15 0	155	55	9,5	17,0	2	78	1,024	2	1	41310	78	0	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,996	2	1	41420	78	0	
	• Pair of locks with lateral application (1 pc.rh, 1 pc.lh) • Keyed alike (KA) • 3 keys per pair	1 02544 14 0	120	55	11,5	13,0	2	60	0,800	2	1	41111	60	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	1,060	2	1	41221	78	0	
		1 02544 15 0	155	55	6,5	20,0	2	78	1,054	2	1	41231	78	0	
		1 02544 15 0	155	55	9,5	17,0	2	78	1,024	2	1	41311	78	0	
		1 02544 10 0	155	55	6,0	15,0	2	78	0,940	2	1	41421	78	0	

Type	Description	Cylinder	L	A	B	S	Throws	Backset	Unit weight 	Pieces 	ITEM						
											Type	Dim.	Hand	Fin.	Pers.	Spec.	
 	• Central application • Straight deadbolt • 2 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,525	12	1	41510	78	0			
	• Central application • Straight deadbolt • 2 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,518	12	1	41510	78	0	00	TC	
	• Central application • Straight deadbolt • 2 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,518	12	1	41510	78	0	00	ZQ	
 	• Lateral application • Bent deadbolt • 1 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,445	12	1	41525	78	1			
			155	55	5,5	15,0	2	78	0,490	12	1	41525	78	2			
 	• Pair of locks with lateral application (1 pc. RH, 1 pc. LH) • Bent deadbolt • 2 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,490	6	1	41525	78	0			
	• Pair of locks with lateral application (1 pc. RH, 1 pc. LH) • Bent deadbolt • Keyed alike (KA) • 3 keys per pair • 2 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,875	6	1	41526	78	0			
	• Pair of locks with lateral application (1 pc. RH, 1 pc. LH) • Bent deadbolt • Keyed alike (KA) • 3 keys per pair • 2 Ø 9 mm pins		155	55	5,5	15,0	2	78	0,940	6	1	41526	78	0	00	TC	

Type	Description	Cylinder								ITEM					
			L	A	B	S	Throws	Backset	Unit weight 	Pieces 	Type	Dim. Hand	Fin.	Pers. Spec.	
	• FOR SWING DOORS • Top lock • OPERATION: from the inside and the outside: opening via the handle, from the outside: key locking, from the inside: lever unlocking • ON REQUEST: KA (Keyed Alike) system		155	55	9	15,0	1		0,462	12	1	41600	00	0	
	• FOR SWING DOORS • Top lock • European profile cylinders to order separately • OPERATION: from the inside and the outside: opening via the handle, from the outside: key locking, from the inside: lever unlocking • ON REQUEST: Cylinder fixing screws		155	55		15,0	1		0,383	12	1	41620	00	0	
	• FOR EXTENSIBLE GATES • Top and bottom locks • European profile cylinders to order separately • OPERATION: from the outside: with key only • ON REQUEST: KA (Keyed Alike) system		142	26	22,0	16,0	2	68	0,200	12	1	41650	00	0	



Technical features:

- Zinc-plated steel case
- Zinc-plated steel faceplate
- Steel dead-bolt

Supplied as standard:

- Cylinder fixing screws (for versions with European profile cylinders)

Hand:
0 = Non-handed






1 = R.H. inwards 









2 = L.H. inwards 








Cylinder to be ordered separately



Use only
OG300 OE300
cylinders series

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	• Latch with built-in dead-bolt • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	22	50	0,789	2	1	42010	50	0		
	• Latch with built-in dead-bolt	1	22	50	0,609	2	1	42011	50	0		
	• Dead-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	2	22	50	0,735	2	1	42020	50	0		
	• Dead-bolt only	2	22	50	0,550	2	1	42021	50	0		
	• Latch with built-in dead-bolt • Inside knob • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	22	50	0,804	2	1	42030	50	1		
		1	22	50	0,804	2	1	42030	50	2		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM					
								Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Latch with built-in dead-bolt • Inside knob	1	22	50	0,607	2	1	42031 50 1					
		1	22	50	0,607	2	1	42031 50 2					
	• Latch-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1		22	30	0,657	2	1	42110 30 0					
	• Latch-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1		22	30	0,470	2	1	42111 30 0					
	• Latch-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	22	30	0,620	2	1	42120 30 0					
	• Latch-bolt only • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	22	30	0,425	2	1	42121 30 0					
	• Latch with dead-locking device • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1		42	22	30	0,713	2	1	42210 30 0				
	• Latch with dead-locking device • Through spindle		42	22	30	0,520	2	1	42211 30 0				
	• Latch with dead-locking device • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	42	22	50	0,832	2	1	42310 50 0				

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Pers. Spec.
	• Latch with dead-locking device • Through spindle	1	42	22	50	0,650	2	1 42311 50 0			
	• Latch and dead-bolt (the latch is withdrawn by key and handle) • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	1	57	22	30	0,853	2	1 42410 30 0			
	• Latch and dead-bolt (the latch is withdrawn by key and handle) • Through spindle	1	57	22	30	0,671	2	1 42411 30 0			
	• Latch and dead-bolt (the latch is withdrawn by key and handle) • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	2	57	22	30	0,724	2	1 42420 30 0			
	• Latch and dead-bolt (the latch is withdrawn by key and handle) • Through spindle	2	57	22	30	0,538	2	1 42421 30 0			
	• Latch and dead-bolt (the latch is withdrawn by key and handle) • Through spindle • Pair of cylinders item 1.02156.00.0 • 3 keys item 1.01330.00.1	2	57	22	50	1,018	2	1 42510 50 0			
	• Latch and dead-bolt (the latch is withdrawn by key and handle) • Through spindle	2	57	22	50	0,825	2	1 42511 50 0			

**Technical features:**

- Steel case
- Steel faceplate
- Lamellar steel deadbolt protected by single throw armour plating
- 13 mm driving gears stroke for additional locking points
- Spindle for operating the dead bolt and driving gears
- Deadbolt resistance equivalent to Grade 3 Security of the European Standard EN 12209:03
 - Side load resistance: 1,000 kg (equivalent to highest grade according to the above Standard)
 - Resistance to blows from below: 400 kg

Supplied as standard:

- Cylinder fixing screws

Finishes:

- Zinc-plated case
- Zinc-plated faceplate
- Zinc-plated deadbolt

Hand:

0 = Non-handle

Cylinder to be ordered separately


 0G303, 0G305,
0E303, 0E305

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.



- Latch bolt only
- CAN BE USED WITH THE FOLLOWING ACCESSORIES:
- European profile cylinders with special cam:
 - Item 1-0G305-02-0-12 (C2000 single cylinder)
 - Item 1-0G303-07-0-12 (C2000 double cylinder)
 - Item 1-0E305-02-0-12 (ASIX single cylinder)
 - Item 1-0E303-07-0-12 (ASIX double cylinder)
- Handle art. 1-06003-00-0
- Handle with edge cover art. 1-06004-00-0
- Striking plate art. 1-06232-21-0
- Adjustable striking plate art. 1-06232-22-0
- Screwed extended bolts art. 1-07088-03-0

1	59	25	19,7	0,590	24	1	46305 19 0
1	59	25	25,7	0,672	24	1	46305 25 0
1	59	25	31,7	0,780	24	1	46305 30 0



- Dead bolt only
- Pin key cylinder complete with 2 pieces item 1.00210.00.0 (KA 1 version, key included)
- CAN BE USED WITH THE FOLLOWING ACCESSORIES:
- Handle item 1.06003.01.0
- Handle with edge cover item 1.06004.01.0
- Striker item 1.06232.21.0
- Adjustable striker item 1.06232.22-0
- Extended bolts item 1.07088.03.0

1	59	25	19,7	0,709	24	1	46307 19 0
1	59	25	25,7	0,804	24	1	46307 25 0

**Technical features:**

- Zinc-plated steel case
- Zinc-plated steel faceplate
- Pre-arranged for additional locking points

Hand:




0 = Non-handed

Operation:

- The handle operates both the swinging dead-bolt and the extended bolts, bringing them in the locking position; the key blocks the handle

Cylinder to be ordered separately**Supplied as standard:**

- Pair of threaded bushings (M8) item 1.06290.10.0
- Cylinder fixing screws
- Instruction sheet

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM					
								Type	Dim.	Hand	Fin.	Pers.	Spec.
	• Nickel-plated dead-bolt	1	85	25	25	0,590	12	1	46300	25	0		
	• Inside steel rose item 1.06092.00.0	1	85	25	30	0,620	12	1	46300	30	0		
	• ON REQUEST:	1	85	25	35	0,625	12	1	46300	35	0		
	Extended bolts item 1.07088.03.0												
	Cylinder with pin key item 1.02400.10.0												
	Floor striker item 1.06086.00.0												
	Floor striker with dust cover item 1.06086.02.0												
	Zinc plated steel striker item 1.06232.21.0												
	• Nickel-plated dead-bolt	1	85	25	25	0,720	12	1	46302	25	0		
	• Inside steel rose item 1.06092.00.0	1	85	25	30	0,750	12	1	46302	30	0		
	• ON REQUEST:	1	85	25	35	0,766	12	1	46302	35	0		
	Extended bolts item 1.07088.03.0												
	Cylinder with pin key item 1.02400.10.0												
	Floor striker item 1.06086.00.0												
	Floor striker with dust cover item 1.06086.02.0												
	• Nickel-plated hook	1	85	25	25	0,580	12	1	46365	25	0		
	• Inside steel rose item 1.06092.00.0	1	85	25	30	0,600	12	1	46365	30	0		
	• Zinc plated steel striker item 1.06232.21.0	1	85	25	35	0,702	12	1	46365	35	0		
	• ON REQUEST:												
	Extended bolts item 1.07088.03.0												
	Cylinder with pin key item 1.02400.10.0												
	Floor striker item 1.06086.00.0												
	Floor striker with dust cover item 1.06086.02.0												
	• Without frontal locking	85	25	25	0,540	12	1	46375	25	0			
• Inside steel rose item 1.06092.00.0	85	25	30	0,560	12	1	46375	30	0				
• ON REQUEST:	85	25	35	0,625	12	1	46375	35	0				

**Technical features:**

- Zinc-plated steel case
- Zinc-plated steel faceplate
- Nickel-plated dead-bolt
- Reversible latch bolt
- Current absorption 3,1 A
- Power supply 12V ac CE

Supplied as standard:

- Cylinder fixing screws
- Instruction sheet

On request:

- Protective rose for cylinder, art. 1.06460.00.0

Certification:

- This lock series is certified according to the European standard EN 12209:03
- Security degree 3 (500 Kg lateral push resistance and 400 Kg upward push resistance)


Hand:

0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.




- Dead-bolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of steel roses item 1.06092.00.0
- ON REQUEST:
Striker item 1.06232.20.0

1	85	25	25	0,787	12	1	16315 25 0
1	85	25	30	0,851	12	1	16315 30 0
1	85	25	35	0,880	12	1	16315 35 0







- Dead-bolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of steel roses item 1.06092.00.0
- Pre-arranged for additional locking points
- Pair of threaded bushings (M8) item 1.06290.05.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
Extended bolts item 1.06415.00.0
Extended bolts item 1.07088.03.0
Floor striker item 1.06086.00.0
Floor striker with dust cover item 1.06086.02.0
Striker item 1.06232.20.0


1	85	25	25	0,901	12	1	16325 25 0
1	85	25	30	0,937	12	1	16325 30 0
1	85	25	35	0,985	12	1	16325 35 0




- Dead-bolt only
- Steel roses item 1.06092.00.0
- ON REQUEST:
Striker item 1.06232.21.0

1	25	25	0,505	12	1	46310 25 0
1	25	30	0,521	12	1	46310 30 0
1	25	35	0,596	12	1	46310 35 0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	• Dead-bolt and latch	1	85	25	25	0,590	12	1 46315	25	0		
	• Set of steel roses item 1.06092.00.0	1	85	25	30	0,625	12	1 46315	30	0		
	• ON REQUEST: Striker item 1.06232.20.0	1	85	25	35	0,680	12	1 46315	35	0		
	• Dead-bolt only	1		25	25	0,618	12	1 46320	25	0		
	• Steel rose item 1.06092.00.0	1		25	30	0,673	12	1 46320	30	0		
	• Pre-arranged for additional locking points • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded pivots for fixing extended bolts • ON REQUEST: Extended bolts item 1.06441.15.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.21.0	1		25	35	0,630	12	1 46320	35	0		
	• Dead-bolt only	1		25	25	0,687	12	1 46322	25	0		
	• Cross-key cylinder with 3 keys	1		25	30	0,707	12	1 46322	30	0		
	• Set of nylon rose item 1.06002.00.0 • Pre-arranged for additional locking points • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded pivots for fixing extended bolts • ON REQUEST: Extended bolts item 1.06441.15.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.21.0	1		25	35	0,727	12	1 46322	35	0		
	• Dead-bolt and latch	1	85	25	25	0,682	12	1 46325	25	0		
	• Pre-arranged for additional locking points	1	85	25	30	0,750	12	1 46325	30	0		
	• Set of steel rose item 1.06092.00.0 • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded pivots for fixing extended bolts • ON REQUEST: Extended bolts item 1.06441.15.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Striker item 1.06232.20.0	1	85	25	35	0,758	12	1 46325	35	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	• Dead-bolt and latch	1	85	25	25	0,797	12	1	46327	25	0	
	• Cross-key cylinder with 3 keys	1	85	25	30	0,817	12	1	46327	30	0	
	• Pre-arranged for additional locking points	1	85	25	35	0,837	12	1	46327	35	0	
	• Set of nylon rose item 1.06002.00.0											
	• Pair of threaded bushings (M8) item 1.06290.05.0											
	• Threaded pivots for fixing extended bolts											
	• ON REQUEST:											
	Extended bolts item 1.06441.15.0											
	Extended bolts item 1.07088.03.0											
	Floor striker item 1.06086.00.0											
	Floor striker with dust cover item 1.06086.02.0											
	Striker item 1.06232.20.0											

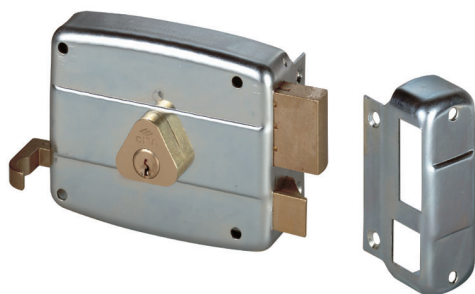**Technical features:**

- Zinc-plated steel case and striker
- Brass latch and dead-bolt
- Brass draw-back pull and knob












Hand:
 1 = R.H.
inwards 

 2 = L.H.
inwards 
Supplied as standard:

- Striker
- Fixing screws
- 3 keys item 1.01310.00.1

On request:

- Protective back plate and striker spacer item 1.07061.10.0

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
	• With fixing tongue • Inside draw-back pull		2	60	1,050	1	1 50421	60	1		
			2	60	1,050	1	1 50421	60	2		
			2	70	1,120	1	1 50421	70	1		
			2	70	1,120	1	1 50421	70	2		
	• With fixing tongue • Inside draw-back pull		2	50	0,965	1	1 50461	50	1		
			2	50	0,975	1	1 50461	50	2		
	• With fixing tongue • Through spindle		2	60	1,150	1	1 50471	60	1		
			2	60	1,170	1	1 50471	60	2		
	• With fixing tongue • Inside knob • Through spindle		2	60	1,150	1	1 50481	60	1		
			2	60	1,160	1	1 50481	60	2		
	• Without fixing tongue • Inside draw-back pull		2	60	1,010	1	1 50521	60	1		
			2	60	1,040	1	1 50521	60	2		
			2	70	1,080	1	1 50521	70	1		
			2	70	1,080	1	1 50521	70	2		
	• Without fixing tongue • Through spindle		2	60	1,110	1	1 50571	60	1		
			2	60	1,120	1	1 50571	60	2		




Technical features:

- Nickel-plated steel case and plate
- Nickel-plated ground steel deadbolt
- Nickel-plated steel thumb turns
- Nickel-plated cylinder

Hand:

1 = R.H.
inwards 
Supplied as standard:

- 3 keys item 1.01310.00.1

Type	Description	Cylinder	Throws	Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.
	• Deadbolt only	 0G200	6	50	0,950	12	1	55254	50	1	
			6	60	0,950	12	1	55254	60	1	
	• Deadbolt with built-in latchbolt	 0G200	6	50	0,950	12	1	55274	50	1	
			6	60	0,950	12	1	55274	60	1	

**Technical features:**

- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel dead-bolt
- Pre-arranged for protective roses

Cylinder to
be ordered
separately

**Supplied as standard:**

- Inside steel escutcheon item 1.06075.00.0
- Cylinder fixing screws
- Instruction sheet


On request:

- Zinc-plated, steel striking plate item 1.06232.00.0

Hand:


0 = Non-handed

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.



- Case height 82 mm.

3	25	52	0,600	12	1 56013 50 0
3	25	60	0,635	12	1 56013 60 0
3	25	70	0,675	12	1 56013 70 0



- Case height 82 mm.
- Pre-arranged for additional locking points
- Pair of threaded bushings (M8) item 1.06290.10.0
- ON REQUEST:
 - Extended bolts item 1.06415.00.0
 - Extended bolts item 1.07088.03.0
 - Floor striker item 1.06086.00.0
 - Floor striker with dust cover item 1.06086.02.0

3	25	60	0,731	12	1 56016 60 0
3	25	70	0,770	12	1 56016 70 0

**Technical features:**

- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel dead-bolt

Supplied as standard:




- Inside steel escutcheon item 1.06124.02.0
- Instruction sheet







On request:

- Zinc-plated steel striking plate item 1.06232.00.0

Hand:

0 = Non-handed

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.
	• Case height 82 mm. • 2 keys	 1 00100 00 1	4	25	52	0,788	12	1	57013	50	0	00	30
			4	25	60	0,833	12	1	57013	60	0	00	30
			4	25	70	0,868	12	1	57013	70	0	00	30
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	25	52	0,760	12	1	57013	52	0	00	30
			4	25	60	0,812	12	1	57013	62	0	00	30
			4	25	70	0,833	12	1	57013	72	0	00	30
	• Case height 82 mm. • 2 keys • Pre-arranged for additional locking points • Pair of threaded bushings (M8) item 1.06290.10.0 • ON REQUEST: Extended bolts item 1.06415.00.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0	 1 00100 00 1	4	25	60	0,940	12	1	57016	60	0		
			4	25	70	0,982	12	1	57016	70	0		
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	25	60	0,925	12	1	57016	62	0		
			4	25	70	0,963	12	1	57016	72	0		
	• Case height 82 mm. • 2 keys • Dead-bolt with 3 locking points	 1 00100 00 1	4	25	60	0,754	12	1	57030	60	0		
			4	25	70	0,780	12	1	57030	70	0		
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	25	60	0,735	12	1	57030	62	0		
			4	25	70	0,773	12	1	57030	72	0		

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.
	- Case height 82 mm. 2 keys - Dead-bolt with 3 locking points - Pre-arranged for additional locking points - Pair of threaded bushings (M8) item 1.06290.10.0 - ON REQUEST: Extended bolts item 1.06415.00.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0	 1 00100 00 1	4	25	60	0,848	12	1 57035 60 0					
			4	25	70	0,919	12	1 57035 70 0					
	- As above, keyed alike (KA) 1 key	 1 00100 00 1	4	25	60	0,838	12	1 57035 62 0					
			4	25	70	0,870	12	1 57035 72 0					
	- Case height 93 mm. 2 keys	 1 00100 00 1	2	22	40	0,520	12	1 57223 40 0					
			2	22	45	0,540	12	1 57223 45 0					
			2	22	50	0,560	12	1 57223 50 0					
			2	22	60	0,592	12	1 57223 60 0					
	- As above, keyed alike (KA) 1 key	 1 00100 00 1	2	22	40	0,506	12	1 57223 42 0					
			2	22	45	0,524	12	1 57223 47 0					
			2	22	50	0,545	12	1 57223 52 0					
			2	22	60	0,578	12	1 57223 62 0					
	- Case height 93 mm. 2 keys - Pre-arranged for additional locking points - Pair of threaded bushings (M8) item 1.06290.10.0 - ON REQUEST: Extended bolts item 1.06415.00.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0	 1 00100 00 1	2	25	45	0,670	12	1 57226 45 0					
			2	25	50	0,687	12	1 57226 50 0					
			2	25	60	0,730	12	1 57226 60 0					
	- As above, keyed alike (KA) 1 key	 1 00100 00 1	2	25	45	0,657	12	1 57226 47 0					
			2	25	50	0,664	12	1 57226 52 0					
			2	25	60	0,708	12	1 57226 62 0					

**Technical features:**



- Zinc-plated case
- Zinc-plated faceplate
- Nickel-plated steel dead-bolt
- Picking resistant protection plate (series 57333, 57336 excluded)
- Nickel-plated latch or reversible latch/bolt
- Electrical and mechanical versions are interchangeable
- Power supply 12V ac CE
- Current absorption 1,7 A





Supplied as standard:




- Instruction sheet





Hand:






0 = Non-handed








Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.
	• Case height 78 mm. • 2 keys • Dead-bolt and latch • Adjustable latch and piston • Dead-locking latch • Hold-open device • Pair of steel roses item 1.06124.02.0 • ON REQUEST: Zinc plated steel striker item 1.06232.00.0	 1 00100 00 1	4	67	25	90	1,220	12	1	17353	90	0	
	• Case height 78 mm. • 2 keys • Dead-bolt and latch • Adjustable latch and piston • Dead-locking latch • Hold-open device • Pair of steel roses item 1.06124.02.0 • Pre-arranged for additional locking points • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded rods for fixing extended bolts • ON REQUEST: Extended bolts item 1.06441.15.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.00.0	 1 00100 00 1	4	67	25	90	1,312	12	1	17358	90	0	










Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.
	- Case height 82 mm. 2 keys - Dead-bolt and latch - Inside steel rose item 1.06124.02.0 - ON REQUEST: Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	70	1,040	12	1 57313 73 0			
	- As above, keyed alike (KA) 1 key	 1 00100 00 1	4	67	25	70	1,016	12	1 57313 72 0			
	- Case height 82 mm. 2 keys - Dead-bolt and latch - Inside steel rose item .06124.02.0 - Pre-arranged for additional locking points - Pair of threaded bushings (M8) item 1.06290.05.0 - ON REQUEST: Extended bolts item 1.06415.00.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	70	1,100	12	1 57318 73 0			
	- As above, keyed alike (KA) 1 key	 1 00100 00 1	4	67	25	70	1,100	12	1 57318 72 0			
	- Case height 82 mm. 2 keys - Dead-bolt only - Inside steel rose item 1.06124.02.0 - ON REQUEST: Zinc plated steel striker item 1.06232.00.0	 1 00100 00 1	4		25	70	0,850	12	1 57333 70 0			
	- Case height 82 mm. 2 keys - Dead-bolt only - Inside steel rose item 1.06124.02.0 - Pre-arranged for extended bolts - Pair of threaded bushings (M8) item 1.06290.10.0 - ON REQUEST: Extended bolts item 1.06415.00.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.00.0	 1 00100 00 1	4		25	70	0,990	12	1 57336 70 0			








Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.
	• Case height 78 mm. • 2 keys • Dead-bolt and latch • Adjustable latch bolt • Inside steel rose item 1.06124.02.0 • ON REQUEST: Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	90	1,100	12	1	57353	90	0	
	• Case height 78 mm. • 2 keys • Dead-bolt and latch • Adjustable latch • Inside steel rose item 1.06124.02.0 • Pre-arranged for extended bolts • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded rods for fixing bushings and extended bolts • ON REQUEST: Extended bolts item 1.06441.15.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	90	1,225	12	1	57358	90	0	
	• As above, keyed alike (KA) • 1 key	 1 00100 00 1	4	67	25	90	1,225	12	1	57358	92	0	
	• Case height 78 mm. • 2 keys • Dead bolt only • Inside steel rose item 1.06124.02.0 • Pre-arranged for extended bolts • Pair of threaded bushings (M8) item 1.06290.05.0 • Threaded rods for fixing bushings and extended bolts • ON REQUEST: Extended bolts item 1.06441.15.0 Extended bolts item 1.07088.03.0 Floor striker item 1.06086.00.0 Floor striker with dust cover item 1.06086.02.0 Zinc plated steel striker item 1.06232.01.0	 1 00100 00 1	4	67	25	90	1,096	12	1	57378	90	0	






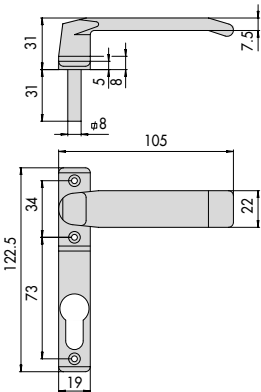
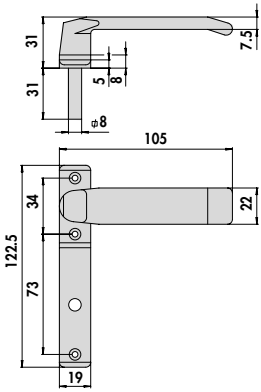
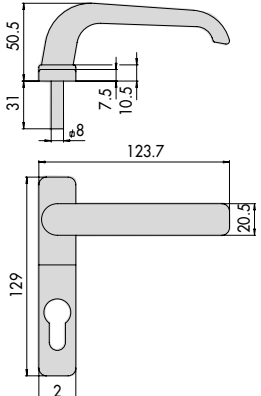
Type	Description	For series/item	 Unit weight	 Pieces	ITEM			
					Type	Dim.	Hand	Per. Spec.
	Black nylon rose	02400	0,001	100	1	06002	00	0
	- Black nylon, low handle, charged with 20% glass fibres, specifically for the 46305 series locks 3 fastening screws	46305	0,100	12	1	06003	00	0
	- Handle, in 20 % fiber glass reinforced black nylon, for use with locks series 46307 3 fixing screws		0,100	12	1	06003	01	0
	- Black nylon, low handle, charged with 20% glass fibres, specifically for the 46305 series locks 3 fastening screws	46305	0,112	12	1	06004	00	0







Type	Description	For series/item	 Unit weight	 Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Handle and edge cover in 20% fiber glass reinforced black nylon, for use with locks series 46307 • 3 fixing screws		0,120	12	1	06004	01	0	
	• Lock shutter accessory		0,100	12	1	06005	00	0	
	• Zinc plated steel rose	42011, 42021, 42031, 42111, 42121, 42211, 42311, 42411, 42421, 42511, 56013, 56016	0,020	100	1	06075	00	0	
	• Brass floor striker diameter 11 mm. • FOR: extended bolts with rods diameter 10 mm.	1 06415 00 0, 1 06441 15 0, 1 07088 03 0, 43090, 43190, 43690, 46445, 52526, 53131, 53137, 53151, 53157, 56255, 57015, 57019, 57020, 57024, 57033, 57055, 57215, 57217, 57255, 57259, 57265, 57296, 57831, 57837, 57851, 57857	0,016	12	1	06086	00	0	
	• Brass floor striker with spring dust-cover, diameter 12 mm. • USED FOR: Internal extended bolts with 8 mm. diameter rods multi-point locks series 46445 Extended bolt for Multitop item 1.06449.11.0		0,020	12	1	06086	02	0	







Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Pers. Spec.
	• Zinc plated steel rose	16315, 16325, 42011, 42021, 42031, 42111, 42121, 42211, 42311, 42411, 42421, 42511, 46300, 46310, 46315, 46320, 46325, 46365, 46375	0,014	100	1 06092 00 0			
	• Zinc plated steel rose	17353, 17358, 57013, 57016, 57030, 57035, 57223, 57226, 57313, 57318, 57333, 57336, 57353, 57358, 57378	0,043	12	1 06124 00 0			
	• Zinc plated steel rose	17353, 17358, 57013, 57016, 57030, 57035, 57223, 57226, 57313, 57318, 57333, 57336, 57353, 57358, 57378	0,020	12	1 06124 02 0			
	• Noise proof bushes for bolts diameter 8.5 mm. (2 pieces) diameter 10 mm. (1 piece)	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,004	25	1 06147 00 0			
	• Zinc plated steel striker	17353, 17358, 56013, 56016, 57013, 57016, 57030, 57035, 57223, 57226, 57333, 57336	0,055	25	1 06232 00 0			
	• Zinc plated steel striker	57313, 57318, 57353, 57358, 57378	0,056	25	1 06232 01 0			
	• Zinc-plated steel faceplate	46215, 46217, 46225, 46227, 46315, 46325, 46327	0,069	25	1 06232 20 0			

Type	Description	For series/item	 Unit weight Kg	 Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Zinc plated steel striker	46300, 46302, 46305, 46307, 46310, 46312, 46320, 46322, 46365	0,056	25	1	06232	21	0	
	• Adjustable zinc-plated steel striker • 2 fastening screws	46305, 46307	0,038	25	1	06232	22	0	
	• Set of threaded bushes (M8) in metal	1 06441 20 0, 16325, 17358, 46320, 46322, 46325, 46327, 57358, 57378	0,050	12	1	06290	05	0	
	• Pair of threaded steel bushings (M8), anti-unscrewing	46300, 46302, 46365, 46375, 56016, 57016, 57035, 57226, 57318, 57336	0,025	25	1	06290	10	0	
	• Zinc plated steel saw resistant tip, 10 mm. • Side push resistance KN 15	1 06415 00 0, 1 06416 00 0, 1 06441 15 0	0,056	12	1	06291	00	0	
	• Zinc plated hardened steel tip, dia. 10 mm. • Side push resistance KN 25	1 06415 00 0, 1 06416 00 0, 1 06441 15 0, 1 07088 03 0	0,054	12	1	06291	05	0	
	• Zinc plated hardened steel tip, dia. 14 mm	1 07088 05 0	0,100	12	1	06291	07	0	
	• Zinc plated steel pin connector	1 06415 00 0, 1 06416 00 0, 1 06441 00 0, 1 06441 10 0, 1 06441 15 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0, 1 07088 03 0	0,016	12	1	06291	20	0	
	• Plate complete with 2 M5 fixing screws for rolling shutters series 41510, 41525, 41526	41510, 41525, 41526	0,014	50	1	06316	00	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin. Pers. Spec.
	• Zinc plated extended bolts - SUPPLIED AS STANDARD: • Pair of bolts dia. 8 mm. • Hardened steel dia. 10 mm. item 1.06291.05.0 (Pcs. 2)	52526, 56016, 56255, 57015, 57016, 57019, 57033, 57035, 57055, 57215, 57217, 57225, 57226, 57255, 57256, 57259, 57265, 57296, 57318, 57336	0,533	12	1 06415 00 0			
	• Zinc plated extended bolts - SUPPLIED AS STANDARD: • Pair of bolts diameter 8 mm. • Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2)	16325, 17358, 46320, 46322, 46325, 46327, 57358, 57378	0,530	12	1 06441 15 0			
	• Nylon contact set complete with spacers: 2 mm. (Pcs. 4)	11000, 12000, 13000	0,035	6	1 06510 00 0			
	• Zinc plated roller striker	11521, 11551	0,208	6	1 07016 00 1			
			0,208	6	1 07016 00 2			
	• Zinc plated roller striker	11721, 11731, 11921, 11931	0,183	6	1 07018 00 1			
			0,182	6	1 07018 00 2			
	• Zinc plated striker	11921, 11931	0,172	6	1 07018 00 3			
			0,183	6	1 07018 00 4			
	• Striker set including: - slide - anchoring plate - screws	11610, 11921, 11931	0,100	1	1 07018 10 3			
			0,100	1	1 07018 10 4			

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Zinc plated roller striker	11761, 11771	0,198	6	1	07020	00	1	
			0,198	6	1	07020	00	2	
	• Striker	1A721, 1A731	0,200	6	1	07021	00	0	
	• 1 mm spacer for striker	1A721, 1A731	0,025	6	1	07021	01	0	
	• Backplate for lock and striker to be welded	1A721, 1A731	0,435	6	1	07021	05	0	
	• Zinc plated striker	50421, 50461,	0,092	6	1	07024	01	1	
		50471, 50481	0,092	6	1	07024	01	2	
	• Zinc plated striker	50521, 50571	0,080	6	1	07024	02	1	
			0,094	6	1	07024	02	2	
	• Coil set • 12V ac CE	1A610, 1A611,	0,092	6	1	07025	00	0	
		1A630, 1A631, 1A721, 1A731							
	• Zinc plated steel protective box for outside cylinder		0,200	10	1	07056	00	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin. Pers. Spec.
	• Zinc plated steel floor striker	11823	0,307	12	1	07058	00	0
	• Protective back plate, striker spacer and zinc plated steel screws	11721, 11726,	0,645	20	1	07061	00	1
		11731, 11736,	0,645	20	1	07061	00	2
		11761, 11771,						
		11921, 11931						
	• Protective back plate with zinc plated steel screws	11823	0,525	20	1	07061	01	1
			0,525	20	1	07061	01	2
	• Protective back plate, striker spacer and zinc plated steel screws	50411, 50421,	0,635	20	1	07061	10	0
		50471, 50481, 50511, 50521, 50571, 50581						
	• Zinc plated extended bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 10 mm. item 1.06291.05.0 (Pcs. 2)	16325, 17358,	0,600	12	1	07088	03	0
		46300, 46302, 46305, 46307, 46320, 46322, 46325, 46327, 46365, 46375, 56016, 57016, 57035, 57226, 57318, 57336, 57358, 57378						
	• Zinc plated extended bolts • SUPPLIED AS STANDARD: Pair of bolts diameter 8 mm. Hardened steel tip diameter 14 mm. item 1.06291.07.0 (Pcs. 2)	16325, 17358,	0,575	12	1	07088	05	0
		46300, 46302, 46305, 46307, 46320, 46322, 46325, 46327, 46365, 46375, 56016, 57016, 57035, 57226, 57318, 57336, 57358, 57378						

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
 	- Coil set 12 V ac C E - Black nylon support	11521, 11540,	0,092	6	1	07118	00	1	
		11551, 11560,	0,092	6	1	07118	00	2	
		11610, 11611,							
		11630, 11631,							
		11660, 11661,							
		11670, 11671,							
		11721, 11731,							
		11761, 11771,							
		11823, 11921,							
		11931							
 	- Adjustable coil set 12 V ac C E - Blue nylon support	11521, 11540,	0,075	6	1	07120	00	1	
		11551, 11560,	0,074	6	1	07120	00	2	
		11610, 11611,							
		11630, 11631,							
		11660, 11661,							
		11670, 11671,							
		11721, 11731,							
		11761, 11771,							
		11823, 11921,							
		11931							
 	- Adjustable coil set 24 V ac C E - Blue nylon support	11540, 11560,	0,075	6	1	07120	01	1	
		11610, 11611,	0,075	6	1	07120	01	2	
		11630, 11631,							
		11660, 11661,							
		11670, 11671							
	- Set of coils 12 V ac CE	17352, 17353,	0,035	6	1	07128	00	0	
		17357, 17358							
	- Set of coils 24 V ac CE	17352, 17353,	0,035	6	1	07128	01	0	
		17357, 17358							

1.11521.40, 1.11551.40

1.11823.80

16325
E = 25 - 30 - 35

1

11721, 11731, 11921, 11931

E = 50 - 60 - 70 - 80

11921, 11926, 11931, 11936

$$E = 50 - 60 - 70 - 80$$

1.17353.90

1.17353.90

2

11761, 11771

$$E = 50 - 60 - 70 - 80$$

16315
E = 25 - 30 - 35

16315
E = 25 - 30 - 35

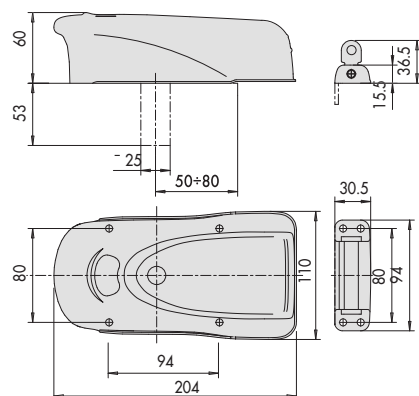
1.17358.90

1.17358.90



3

6

9




1A610, 1A611, 1A630, 1A721, 1A731

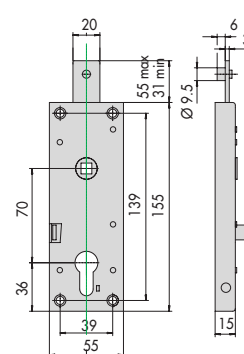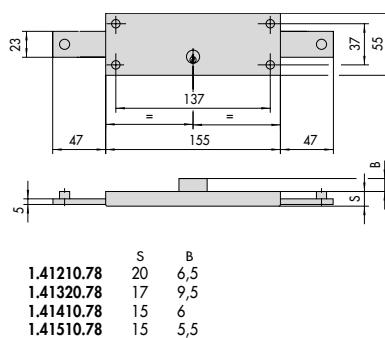


1.41620.00.0

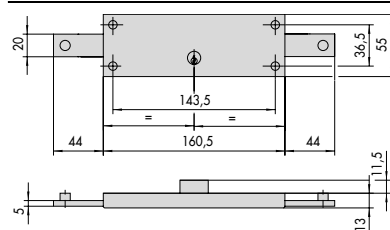10




1.41010.80

13




13

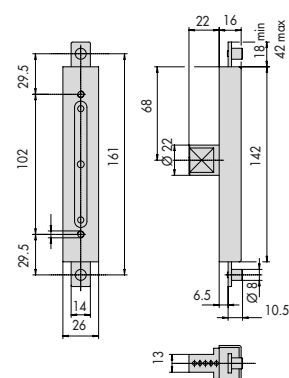16




1.41650.00.0

11




1.41110.60, 1.41111.60

14



1.41600.00.0

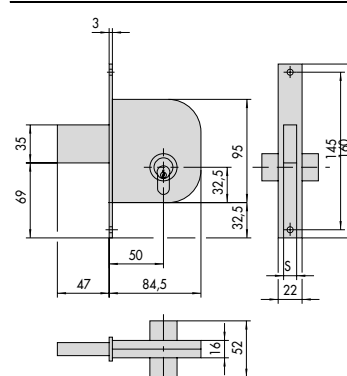17




1.42010.50, 1.42011.50
1.42020.50, 1.42021.50

S
12
9


12

15

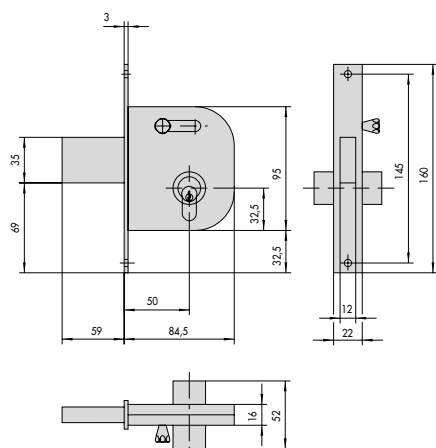
18



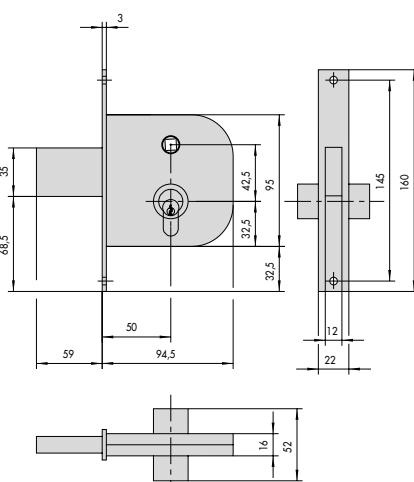1.42030.50, 1.42031.50




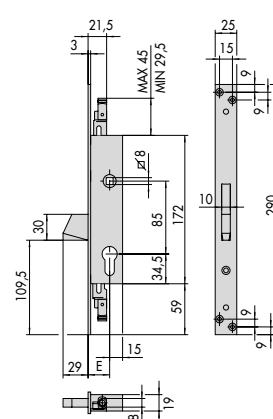1.42310.50, 1.42311.50



46300, 46302
E = 25 - 30 - 35

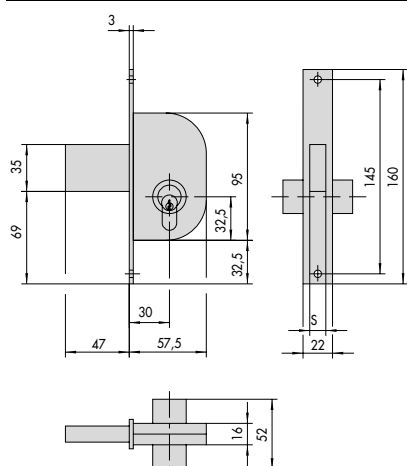
19



1.42110.30, 1.42111.30
1.42120.30, 1.42121.30


S
12
9

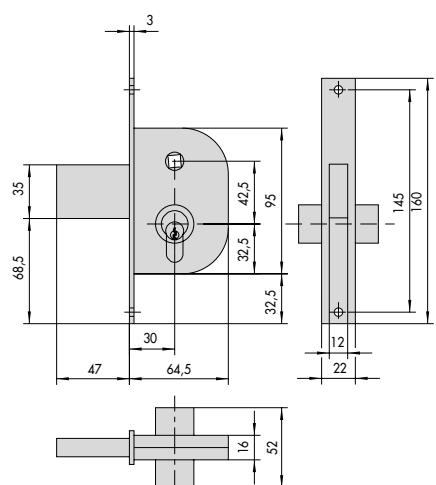20



1.42210.30, 1.42211.30

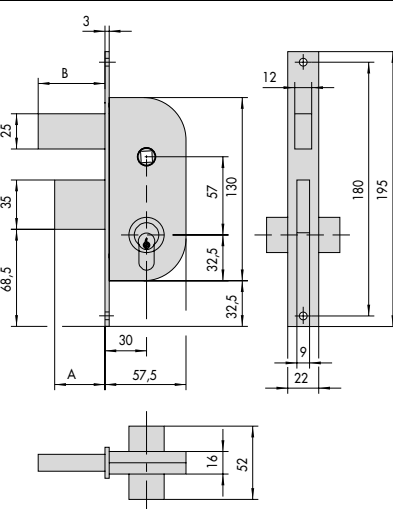21




1.42410.30, 1.42411.30
1.42420.30, 1.42421.30

A B
47 47
28 24


22

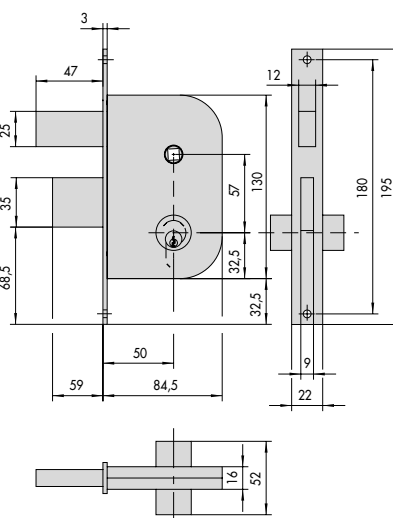23



1.42510.50, 1.42511.50

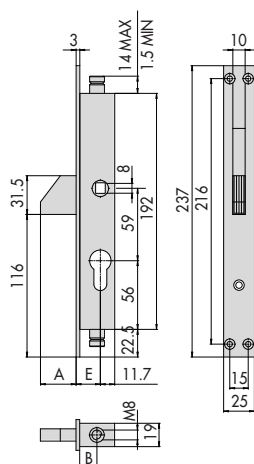24




1.46305.19.0
1.46305.25.0
1.46305.30.0
1.46307.19.0
1.46307.25.0

E A B
19,7 29 14
25,7 23 20
31,7 22 26,5
19,7 29 14
25,7 23 20


25

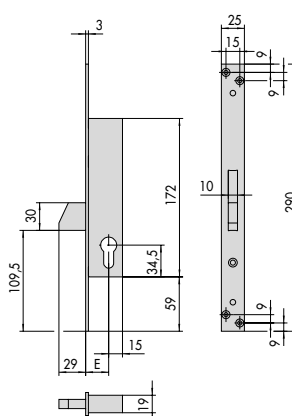26




46310, 46312
E = 25 - 30 - 35

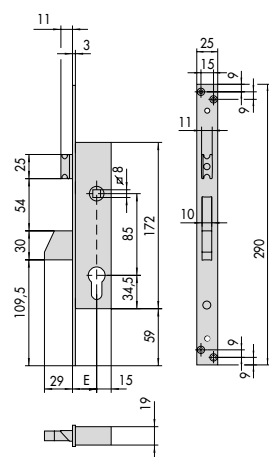
27



46315
E = 25 - 30 - 35

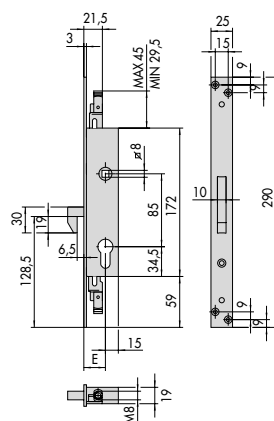

46365
E = 25 - 30 - 35

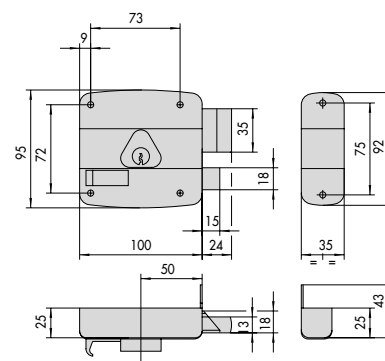


1.50461.50


28

31

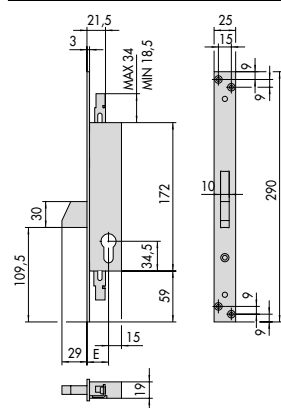
34



46320, 46322
E = 25 - 30 - 35

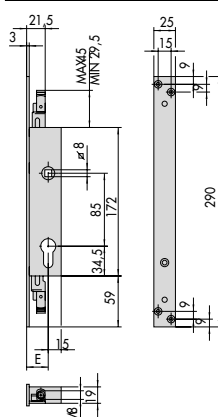

46375
E = 25 - 30 - 35

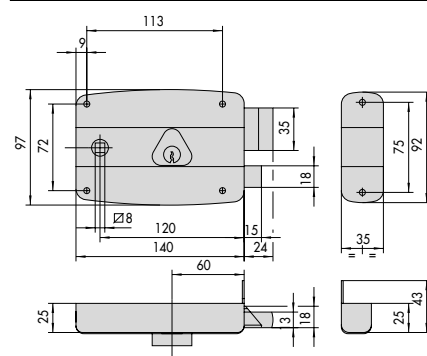


1.50171.60, 1.50471.60, 1.50481.60


29

32

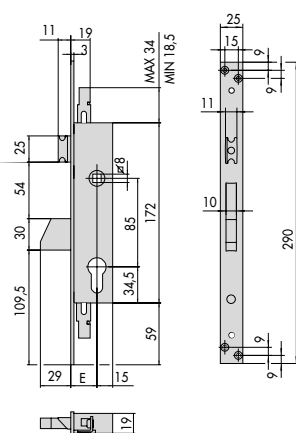
35



46325, 46327
E = 25 - 30 - 35

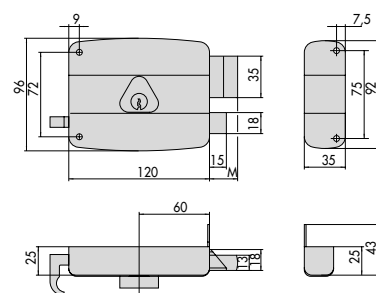

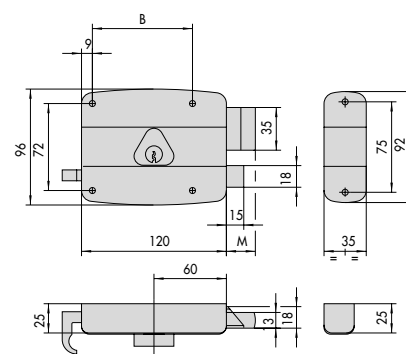1.50421.60




1.50521.60


30

33

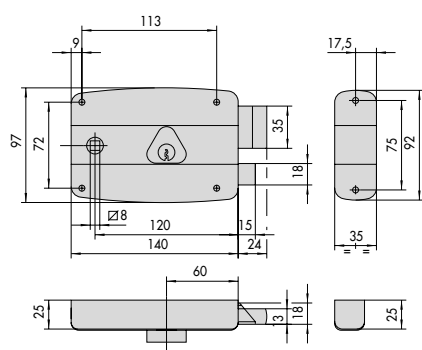
36



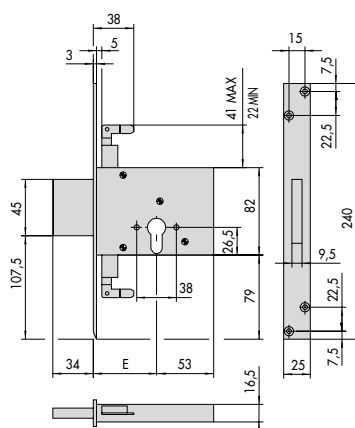1.50571.60




56016
E = 60 - 70

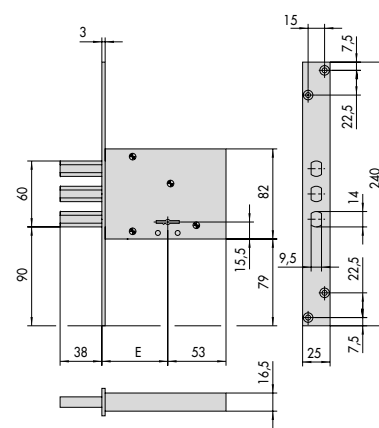


57030
E = 60 - 70

37




55254, 55274

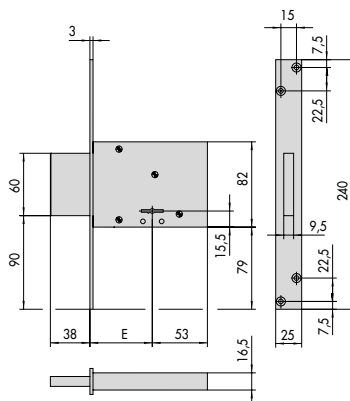40




57013
E = 52 - 60 - 70

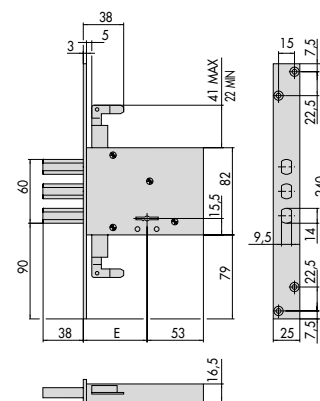43




57035
E = 60 - 70

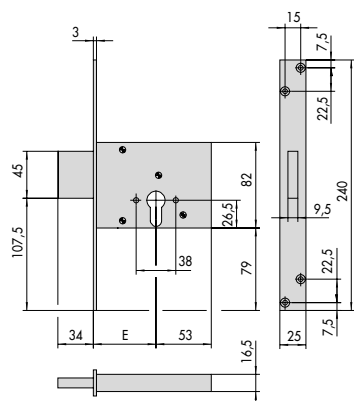38




56013
E = 52 - 60 - 70

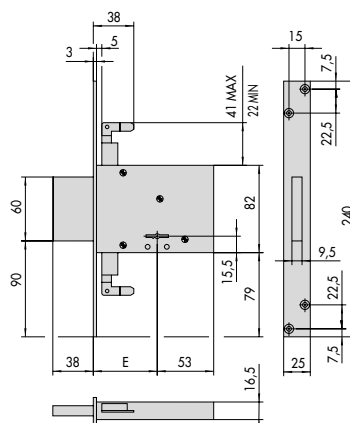41



57016
E = 60 - 70

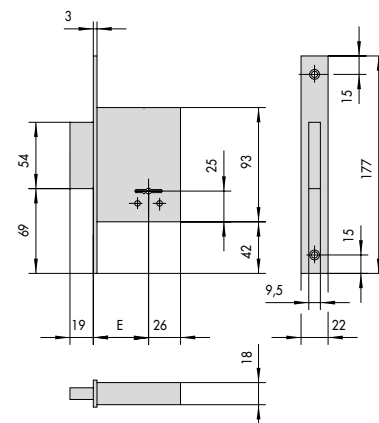44




57223
E = 40 - 45 - 50 - 60


39

42

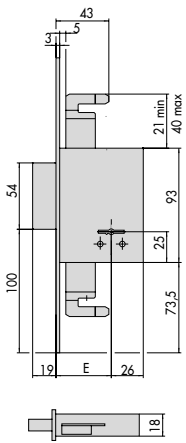
45



57226
E = 45 - 50 - 60

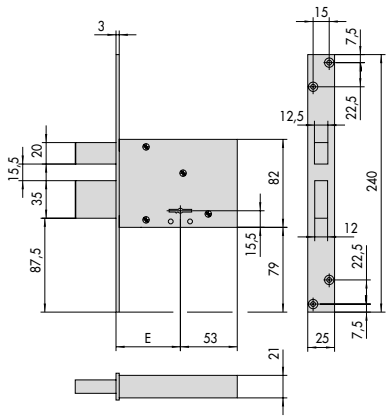


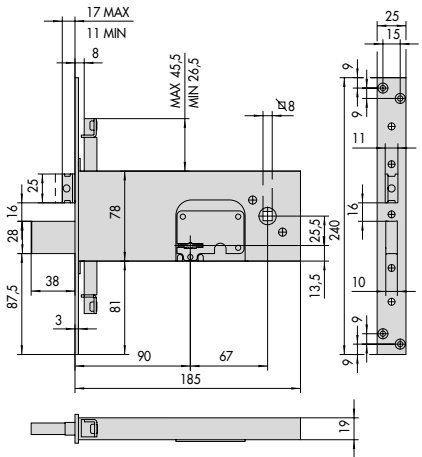1.57333.70




57358, 57378

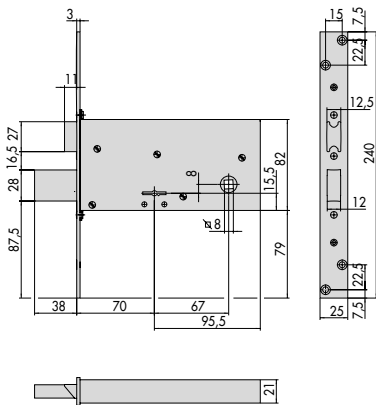46



57313

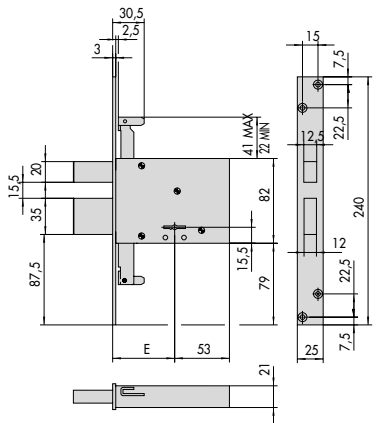
49



1.57336.70


52

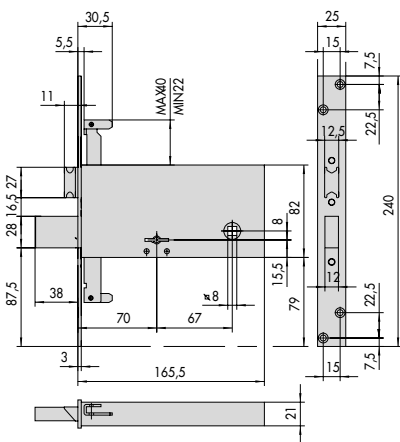47



57318

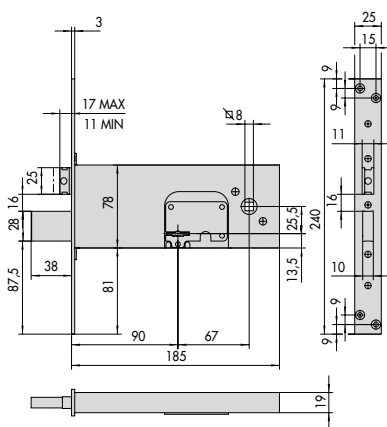50



1.57353.90

48

51