

Safes



CWall safes with electronic combinator - Digit vision	513
Wall safes with key	514
Wall safes, 1 star key	515
Wall safes, with mechanical combinator	516
Darwin series modular wall safes	518
Standing safes with electronic combinator - Digit vision	519
CASH Standing safes with electronic combinator	520

Standing safes with key	521
Standing safes, 1 star key	522
Standing safes with mechanical combinator	523
Hotel safes - Digit Plus	524
Gun safes	525
Safe display stands	526
Spare parts and accessories for safes	527
Dimentional drawing	532



**Technical features:**


- Lit keypad.
- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Power cable
- Shelves
- Use and maintenance instructions
- Installation instructions.

DGT Vision

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	 Unit weight	 Pieces	ITEM			
			L	H	P							Type	Dim.	Hand.	Fin.



- Electronic combinator
- Internal light
- 1.5 V alkaline thin battery operation
- Removable door
- Laser welded sealing parts assembly

360	240	150	10	2	1	14,400	1	1 82710 30 0
360	240	200	10	2	1	15,400	1	1 82710 31 0
360	240	250	10	2	1	16,700	1	1 82710 32 0
420	300	200	10	2	2	21,600	1	1 82710 40 0
420	300	250	10	2	2	23,100	1	1 82710 41 0
420	300	300	10	2	2	24,900	1	1 82710 42 0
490	360	200	10	2	2	28,950	1	1 82710 50 0
490	360	250	10	2	2	30,000	1	1 82710 51 0
490	360	300	10	2	2	31,750	1	1 82710 52 0
360	490	200	10	2	4	29,350	1	1 82710 70 0
360	490	250	10	2	4	31,000	1	1 82710 71 0
360	490	300	10	2	4	32,700	1	1 82710 72 0
420	550	200	12	2	4	39,700	1	1 82710 80 0
420	550	250	12	2	4	39,700	1	1 82710 81 0
420	550	300	12	2	4	39,700	1	1 82710 82 0
490	620	200	12	2	4	51,000	1	1 82710 90 0
490	620	250	12	2	4	51,000	1	1 82710 91 0
490	620	300	12	2	4	51,000	1	1 82710 92 0


**Technical features:**

- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled through automated welding
- Nickel-plated rolling steel dead-bolts (diameter 22 mm.)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe

Supplied as standard:

- Shelves
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	 Pieces	ITEM				
			L	H	P							Type	Dim.	Hand	Fin.	Pers. Spec.



- Key only version
- 2 keys item 1.00100.00.2

260	170	150	10	2	-	8,300	1	1	82010 10 0	
260	170	200	10	2	-	9,300	1	1	82010 11 0	
*	310	190	150	10	2	1	10,600	1	1	82010 20 0
*	310	190	200	10	2	1	11,400	1	1	82010 21 0
*	360	240	150	10	2	1	14,550	1	1	82010 30 0
*	360	240	200	10	2	1	15,600	1	1	82010 31 0
	360	240	250	10	2	1	16,900	1	1	82010 32 0
*	420	300	200	10	2	2	21,600	1	1	82010 40 0
*	420	300	250	10	2	2	25,000	1	1	82010 41 0
	420	300	300	10	2	2	24,500	1	1	82010 42 0
*	490	360	200	10	2	2	33,000	1	1	82010 50 0
*	490	360	250	10	2	2	30,500	1	1	82010 51 0
	490	360	300	10	2	2	31,700	1	1	82010 52 0
	360	490	200	10	2	4	32,200	1	1	82010 70 0
	360	490	250	10	2	4	34,400	1	1	82010 71 0
	360	490	300	10	2	4	35,700	1	1	82010 72 0
	420	550	200	12	2	4	39,700	1	1	82010 80 0
	420	550	250	12	2	4	41,300	1	1	82010 81 0
	420	550	300	12	2	4	43,500	1	1	82010 82 0
	490	620	200	12	2	4	51,000	1	1	82010 90 0
	490	620	250	12	2	4	52,800	1	1	82010 91 0
	490	620	300	12	2	4	54,800	1	1	82010 92 0

**Technical features:**

- 8 mm. thick steel doors with laser cut between the frame and door
- Nickel-plated steel anti-sawing rolling dead-bolts (diameter 22 mm.)
- Seals are assembled through automated welding
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door


Supplied as standard:

- Shelves
- Installation instructions
- Instruction sheet

Standards:

- Manufactured in conformity with the UNI 10868:2000 Standards, grade 1 STAR resistance

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	 Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Pers. Spec.



- Key only version
- 2 keys item 1.00100.00.2

	310	190	145	8		2	1	9,400	1	1 8A010 20 0	
	310	190	195	8		2	1	10,300	1	1 8A010 21 0	
*	360	240	145	8		2	1	12,650	1	1 8A010 30 0	
	360	240	195	8		2	1	13,700	1	1 8A010 31 0	
	420	300	195	8		2	1	18,100	1	1 8A010 40 0	
*	420	300	245	8		2	1	20,000	1	1 8A010 41 0	


**Technical features:**

- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm.)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:


- Shelves
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	 Unit weight	 Pieces	ITEM				
			L	H	P							Type	Dim.	Hand	Fin.	Pers. Spec.



- Key and 3-knob combinator version
- 2 keys item 1.00101.00.2

*	310	190	150	10		2	1	11,000	1	1	82210 20 0
*	310	190	200	10		2	1	12,000	1	1	82210 21 0
*	360	240	150	10		2	1	15,000	1	1	82210 30 0
*	360	240	200	10		2	1	15,850	1	1	82210 31 0
	360	240	250	10		2	1	12,900	1	1	82210 32 0
*	420	300	200	10	2	2	1	22,200	1	1	82210 40 0
*	420	300	250	10	2	2	1	23,500	1	1	82210 41 0
	420	300	300	10	2	2	1	24,750	1	1	82210 42 0
*	490	360	200	10	2	2	1	28,700	1	1	82210 50 0
*	490	360	250	10	2	2	1	30,500	1	1	82210 51 0
	490	360	300	10	2	2	1	32,000	1	1	82210 52 0
	360	490	200	10	2	4	2	29,400	1	1	82210 70 0
	360	490	250	10	2	4	2	30,950	1	1	82210 71 0
	360	490	300	10	2	4	2	36,150	1	1	82210 72 0
	420	550	200	12	2	4	2	40,000	1	1	82210 80 0
	420	550	250	12	2	4	2	42,850	1	1	82210 81 0
	420	550	300	12	2	4	2	43,900	1	1	82210 82 0
	490	620	200	12	2	4	2	51,000	1	1	82210 90 0
	490	620	250	12	2	4	2	52,800	1	1	82210 91 0
	490	620	300	12	2	4	2	55,250	1	1	82210 92 0

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight	Pieces	ITEM					
			L	H	P							Type	Dim.	Hand.	Fin.	Pers.	Spec.
 • 3-knob combinator only version																	
	*	310	190	150	10			2	1	10,800	1	1	82410	20	0		
	*	310	190	200	10			2	1	11,700	1	1	82410	21	0		
	*	360	240	150	10			2	1	14,700	1	1	82410	30	0		
	*	360	240	200	10			2	1	15,800	1	1	82410	31	0		
		360	240	250	10			2	1	17,300	1	1	82410	32	0		
	*	420	300	200	10	2	2	1	1	22,000	1	1	82410	40	0		
	*	420	300	250	10	2	2	1	1	23,150	1	1	82410	41	0		
		420	300	300	10	2	2	1	1	24,500	1	1	82410	42	0		
	*	490	360	200	10	2	2	1	1	28,950	1	1	82410	50	0		
	*	490	360	250	10	2	2	1	1	30,700	1	1	82410	51	0		
		490	360	300	10	2	2	1	1	35,000	1	1	82410	52	0		
		360	490	200	10	2	4	2	1	29,500	1	1	82410	70	0		
		360	490	250	10	2	4	2	1	31,000	1	1	82410	71	0		
		360	490	300	10	2	4	2	1	35,700	1	1	82410	72	0		
		420	550	200	12	2	4	2	1	40,700	1	1	82410	80	0		
		420	550	250	12	2	4	2	1	42,000	1	1	82410	81	0		
		420	550	300	12	2	4	2	1	44,000	1	1	82410	82	0		
		490	620	200	12	2	4	2	1	50,700	1	1	82410	90	0		
		490	620	250	12	2	4	2	1	53,000	1	1	82410	91	0		
		490	620	300	12	2	4	2	1	54,500	1	1	82410	92	0		

**Technical features:**


- Modular front and safe compartment
- 10 mm. thick steel front
- 5 mm. thick steel side and upper walls
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm.)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Frame edge cover
- Shelf
- Bolts for fixing the compartment
- Instruction sheet
- Installation instructions


Darwin

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	 Pieces	ITEM				
			L	H	P							Type	Dim.	Hand	Fin.	Pers. Spec.




- Safe compartment with temporary cover

	470	336	200	-	10,650	1	1	83000	40	0
*	470	336	250	-	12,000	1	1	83000	41	0



- Faceplate with key
- Two keys item 1.00101.00.2
- To be combined with item 83000.40/41

*	420	300	10	2	2	1	19,400	1	1	83010	40	0
---	-----	-----	----	---	---	---	--------	---	---	-------	----	---



- Lit keypad
- Faceplate with electronic combinator
- Internal light
- To be combined with item 83000.40/41
- 1.5 V alkaline thin battery operation
- Laser welded sealing parts assembly
- SUPPLIED AS STANDARD:
Power cable

	420	300	10	2	2	1	18,300	1	1	83710	40	0
--	-----	-----	----	---	---	---	--------	---	---	-------	----	---

**Technical features:**


- Lit keypad.
- 10 mm thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Power cable
- Shelves
- Use and maintenance instructions
- Installation instructions.

DGT Vision

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	 Unit weight	 Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Fin.



- Electronic combinator
- Internal light
- 1.5 V alkaline thin battery operation
- Removable door
- Laser welded sealing parts assembly

360	240	300	10		2	1	28,200	1	1	82750	34	0
420	300	350	10	2	2	1	40,500	1	1	82750	43	0
490	360	350	10	2	2	1	51,000	1	1	82750	53	0
360	490	400	10	2	4	2	55,650	1	1	82750	74	0
420	550	450	12	2	4	2	75,000	1	1	82750	85	0
490	620	450	12	2	4	2	92,000	1	1	82750	95	0

**Technical features:**


- 10 mm thick, steel front
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Power cable
- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

DGT Cash

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	 Pieces	ITEM				
			L	H	P							Type	Dim.	Hand	Fin.	Pers. Spec.
			360	270	300	10		2	1	22,200	1	1	82751	35	0	
	• Back-lit alphanumeric keypad • Slot to introduce money or papers • Opening delay programmable between 1 and 99 minutes • Electronic combinator • Internal light • 1.5 V alkaline battery powered • Removable door • Laser welded sealing part assembly		360	520	400	10	2	4	2	52,400	1	1	82751	75	0	




**Technical features:**

- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Side and upper walls in 5 mm. thick steel
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm.)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe

Supplied as standard:

- Shelves
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	 Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Pers. Spec.



- Key only version
- Two keys item 1.00101.00.2

	360	240	300	10		2	1	28,300	1	1 82050 34 0	
	420	300	350	10	2	2	1	40,900	1	1 82050 43 0	
	490	360	350	10	2	2	1	54,000	1	1 82050 53 0	
*	360	490	400	10	2	4	2	54,900	1	1 82050 74 0	
	420	550	450	12	2	4	2	75,500	1	1 82050 85 0	
	490	620	450	12	2	4	2	92,000	1	1 82050 95 0	


**Technical features:**

- 8 mm thick, steel front
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm)
- Special, high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:

- Shelves (where these are provided for)
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	 Pieces	ITEM				
			L	H	P							Type	Dim.	Hand	Fin.	Pers. Spec.



- Key only version
- 2 keys item 1.00100.00.2

310	190	250	8	2	1	13,200	1	1	8A050 23 0
360	240	300	8	2	1	19,600	1	1	8A050 34 0
420	300	350	8	2	1	27,350	1	1	8A050 43 0


**Technical features:**

- 10 mm. thick steel front (12 mm. for the 420x550 and 490x620 versions)
- Side and upper walls in 5 mm. thick steel
- Seals are assembled using tough welds
- Nickel-plated rolling steel dead-bolts (diameter 22 mm.)
- Special high-resistance anti-corrosion kiln painting
- Carbonitrided steel lock protection plate
- Lock and mechanisms are fixed directly onto the door of the safe.
- Opening commands do not protrude when in the rest position

Supplied as standard:


- Shelves
- Instruction sheet
- Installation instructions

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	 Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Pers. Spec.



- Key and 3-knob combinator version
- Two keys item 1.00101.00.2

*	360	240	300	10		2	1	28,600	1	1 82250 34 0	
*	420	300	350	10	2	2	1	42,800	1	1 82250 43 0	
*	490	360	350	10	2	2	1	55,000	1	1 82250 53 0	
	360	490	400	10	2	4	2	59,000	1	1 82250 74 0	
	420	550	450	12	2	4	2	75,750	1	1 82250 85 0	
	490	620	450	12	2	4	2	93,080	1	1 82250 95 0	



- 3-knob combinator only version

	360	240	300	10		2	1	28,600	1	1 82450 34 0	
	420	300	350	10	2	2	1	42,200	1	1 82450 43 0	
	490	360	350	10	2	2	1	53,800	1	1 82450 53 0	
	360	490	400	10	2	4	2	58,700	1	1 82450 74 0	
	420	550	450	12	2	4	2	75,600	1	1 82450 85 0	
	490	620	450	12	2	4	2	92,500	1	1 82450 95 0	

**Technical features:**

- Technical features
- Sized for laptop PCs
- Motor-driven lock
- Emergency mechanical opening
- Display unit
- Master Code

Supplied as standard:

- 4 AARL6 batteries
- Internal mat


Finish:

- STANDARD:
Silicon grey (RAL 7032)
- ON REQUEST:
Graphite (RAL 7015) Spec. 93

On request:

- Internal power outlet
- 6 digit code
- L.H. opening door
- Master Code opening delay

Digit Plus

Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	Unit weight 	 Pieces	ITEM				
			L	H	P							Type	Dim.	Hand	Fin.	Pers. Spec.
 • Digit Plus • Digit Plus Compact • Digit Plus Memory • Latest 100 operations log			430	192	350	6	2	-	14,200	1	1	A0G02 01 0				
			360	220	220	6	2	-	11,000	1	1	A0G06 01 0				
			430	192	350	6	2	-	14,200	1	1	A0G04 01 0				
	• Digit Plus Memory Compact • Latest 100 operations log		360	220	220	6	2	-	11,000	1	1	A0G08 01 0				
 • Dot matrix plot printer									1,150	1	1	A0G00 00 0				




Technical features:

- 3 mm thickness for casing and door
- Laser cut between frame and door
- Sturdy welds to assemble tightness parts
- 18 mm diameter steel rotary deadbolts
- Opening controls not protruding at rest
- Capacity: 6 guns

Supplied as standard:

- Cartridge store
- Instruction sheet
- Installation instructions


Type	Description	Prompt delivery	Outside dim.			Door thickness	Vertical bolts	Horizontal bolts	No. of shelves	 Unit weight	 Pieces	ITEM			
			L	H	P							Type	Dim.	Hand	Pers. Spec.

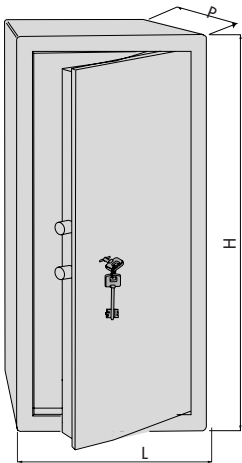

- Double Bitted Key
- Capacity: 6 slots

555	1380	205	3		2	1	66,000	1	1 84080 06 0
555	1380	205	3		2	1	68,000	1	1 84081 06 0
555	1380	205	3	2	3	1	68,000	1	1 84181 06 0

Type	Description	For series/item			ITEM				
			Unit weight	Pieces	Type	Dim.	Hand	Fin.	Pers. Spec.







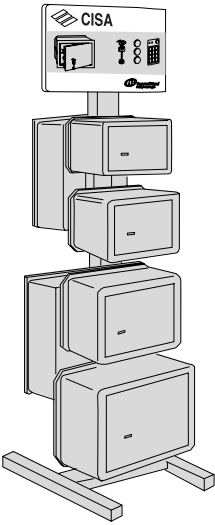








- DISPLAY FOR WALL SAFES
- WITH ADJUSTABLE SUPPORTS
- FOR WALL AND STANDING SAFES





15,000




1

1 06610 50 0


Type	Description	For series/item	 Unit weight	 Pieces	ITEM			
					Type	Dim.	Hand	Fin. Pers. Spec.
	• Combinator dial and plate	1 58010 00 0	0,200	0	1 07095 00 0			
	• Set of 3 knobs and combinator changing key	1 58011 00 0	0,150	1	1 07108 00 0			
	• Lock operating knob	1 57424 30 1, 1 57429 30 1	0,160	1	1 07109 00 0			
	• Changing key for safes with combinator	1 58010 00 0, 82310, 82350, 82510, 82550	0,020	1	1 07109 01 0			
	• Changing key set for safes with 3-knob combinator	1 58011 00 0, 82210, 82250, 82410, 82450	0,040	0	1 07109 03 0			
	• 9V battery holder	82610, 82650	0,030	1	1 07114 00 0			
	• Electronic board master code		0,035	1	1 07114 12 0			
	• Electronic board for Digit Vision safe	82710, 82750	0,035	1	1 07114 15 0			
	• 6V battery holder	82610, 82650, 82710, 82750	0,030	1	1 07114 05 0			
	• Solenoide plate group 6V		0,250	0	1 07114 06 0			

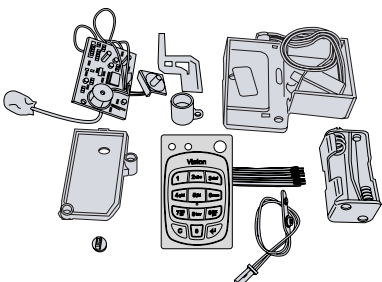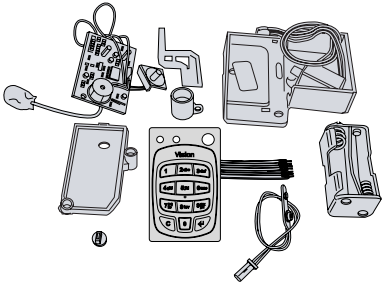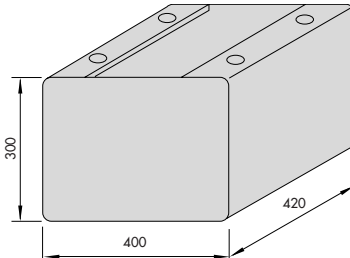Type	Description	For series/item	 Unit weight	 Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	Kit to convert from safes Digit to safes Digit Vision Master Code		0,370	1	1	07114	11	0	
	Key pad for Digit Vision safe		0,005	1	1	07114	16	0	
	Kit to convert from safes Digit to safes Digit Vision		0,370	1	1	07114	17	0	
	Lacquered steel support for furniture safes	1 82050 74 0, 1 82250 74 0, 1 82350 74 0, 1 82450 74 0, 1 82550 74 0, 1 82650 74 0	16,650	1	1	07125	00	0	
	Lacquered steel support for furniture safes	1 82050 85 0, 1 82050 95 0, 1 82250 85 0, 1 82250 95 0, 1 82350 85 0, 1 82350 95 0, 1 82450 85 0, 1 82450 95 0, 1 82550 85 0, 1 82550 95 0	17,950	1	1	07125	01	0	
	Box for digit cash safes		1,000	1	1	07125	05	0	

Type	Description	For series/item	 Unit weight	 Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• 6V external power supply cable	82610, 82650, 82651	0,030	1	1 07430 31 0				
	• 6V external power supply cable	82710, 82750, 82751	0,030	1	1 07430 32 0				
	• Zinc plated steel lock • One locking point • Two keys item 1.00101.00.2 • FOR KEY-OPERATED SAFES: item 1.82010.10.0 item 1.82010.11.0		0,426	1	1 57409 30 1				
	• Zinc plated steel lock • One locking point • Two keys item 1.00101.00.2 • FOR SAFES OPERATED EITHER BY KEY ONLY OR KEY AND MECHANICAL COMBINATOR: Series 82010.20÷32 Series 82050.34 Series 82210.20÷32 Series 82250.34 Series 82310.30÷32 Series 82350.34		0,460	1	1 57411 30 1				
	• Zinc plated steel lock • One locking point • Two keys item 1.00101.00.2 • FOR 1 STAR SAFES OPERATED BY KEY ONLY: Series 8A010.20÷41		0,460	1	1 57411 31 1				

Type	Description	For series/item	 Unit weight	 Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Zinc plated steel lock • Three locking points • Two keys item 1.00101.00.2 • FOR SAFES OPERATED EITHER BY KEY ONLY OR KEY AND MECHANICAL COMBINATOR: - Series 82010.40÷92 - Series 82050.43÷95 - Series 82210.40÷92 - Series 82250.43÷95 - Series 82310.40÷92 - Series 82350.43÷95 - Series 83010.40		0,620	1	1	57416	30	1	
	• Zinc plated steel lock • Three locking points • Two keys item 1.00101.00.2 • FOR 1 STAR SAFES OPERATED BY KEY ONLY: - Series 82010.40÷92 - Series 82050.43÷95 - Series 82210.40÷92 - Series 82250.43÷95 - Series 82310.40÷92 - Series 82350.43÷95 - Series 83010.40		0,620	1	1	57416	31	1	
	• Zinc plated single throw steel lock • Three locking points • FOR SAFES OPERATED EITHER BY MECHANICAL OR ELECTRONICAL COMBINATOR: - Series 82410.40÷92 - Series 82450.43÷95 - Series 82510.40÷92 - Series 82550.43÷95 - Series 82610.40÷72 - Series 82650.43÷74 - Series 83610.40		0,500	1	1	57424	30	1	
	• Zinc plated single throw steel lock • One locking point • FOR SAFES OPERATED EITHER BY MECHANICAL OR ELECTRONICAL COMBINATOR: - Series 82410.20÷32 - Series 82450.34 - Series 82510.30÷32 - Series 82550.34 - Series 82610.30÷32 - Series 82650.34		0,400	1	1	57429	30	1	
	• Combinator dial	82310, 82315, 82350, 82510, 82515, 82550	0,400	1	1	58010	00	0	

Type	Description	For series/item			ITEM			
			Unit weight	Pieces	Type	Dim.	Hand	Pers. Spec.




- 3-knob combinator

82210, 82250,
82410, 82450

0,430

1

1 58011 00 0




- Lock for gun safe

84080, 84081,
84081


0,650

1

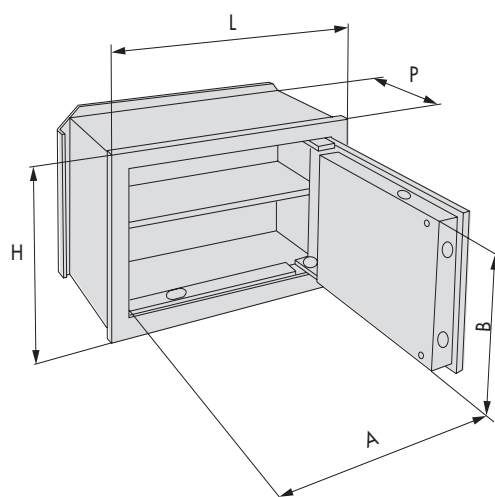
1 87409 70 0



    ITEM				DIMENSIONS (mm)										Deadbolt Shelfs		Weight Kg
				Outside			Inside			A B		Rear Outside				
				L	H	P	L	H	P							
1-8A010-20				310	190	150	292	172	100	192	115	340	210	2	1	12,9
1-8A010-21				"	"	200	"	"	150	192	115	340	210	2	1	13,6
1-8A010-30				360	240	150	342	222	100	242	165	390	260	2	1	17,5
1-8A010-31				"	"	200	"	"	150	242	165	390	260	2	1	18,4
1-8A010-40				420	300	200	402	282	150	302	225	450	320	2	1	24,7
1-8A010-41				"	"	250	"	"	200	302	225	450	320	2	1	25,8
1-82010-10				260	170	150	242	152	100	142	95	290	190	2	-	7,3
1-82010-11				"	"	200	"	"	150	142	95	290	190	2	-	8,0
1-82010-20	1-82210-20	1-82410-20		310	190	150	292	172	100	192	115	340	210	2	1	12,9
1-82010-21	1-82210-21	1-82410-21		"	"	200	"	"	150	192	115	340	210	2	1	13,6
1-82010-22	1-82210-22	1-82410-22		"	"	250	"	"	200	192	115	340	210	2	1	14,4
1-82010-30	1-82210-30	1-82410-30	1-82710-30	360	240	150	342	222	100	242	165	390	260	2	1	17,5
1-82010-31	1-82210-31	1-82410-31	1-82710-31	"	"	200	"	"	150	242	165	390	260	2	1	18,4
1-82010-32	1-82210-32	1-82410-32	1-82710-32	"	"	250	"	"	200	242	165	390	260	2	1	19,3
1-82010-40	1-82210-40	1-82410-40	1-82710-40	420	300	200	402	282	150	302	225	450	320	4+2	1	24,7
1-82010-41	1-82210-41	1-82410-41	1-82710-41	"	"	250	"	"	200	302	225	450	320	4+2	1	25,8
1-82010-42	1-82210-42	1-82410-42	1-82710-42	"	"	300	"	"	250	302	225	450	320	4+2	1	26,9
1-82010-50	1-82210-50	1-82410-50	1-82710-50	490	360	200	472	342	150	372	285	520	380	4+2	1	33,1
1-82010-51	1-82210-51	1-82410-51	1-82710-51	"	"	250	"	"	200	372	285	520	380	4+2	1	34,4
1-82010-52	1-82210-52	1-82410-52	1-82710-52	"	"	300	"	"	250	372	285	520	380	4+2	1	35,7
1-82010-70	1-82210-70	1-82410-70	1-82710-70	360	490	200	342	472	150	242	415	390	510	4+2	2	33,1
1-82010-71	1-82210-71	1-82410-71	1-82710-71	"	"	250	"	"	200	242	415	390	510	4+2	2	34,4
1-82010-72	1-82210-72	1-82410-72	1-82710-72	"	"	300	"	"	250	242	415	390	510	4+2	2	35,7
1-82010-80	1-82210-80	1-82410-80	1-82710-80	420	550	200	402	532	150	302	475	450	570	4+2	2	39,7
1-82010-81	1-82210-81	1-82410-81	1-82710-81	"	"	250	"	"	200	302	475	450	570	4+2	2	41,3
1-82010-82	1-82210-82	1-82410-82	1-82710-82	"	"	300	"	"	250	302	475	450	570	4+2	2	42,9
1-82010-90	1-82210-90	1-82410-90	1-82710-90	490	620	200	472	602	150	372	545	520	640	4+2	2	51,0
1-82010-91	1-82210-91	1-82410-91	1-82710-91	"	"	250	"	"	200	372	545	520	640	4+2	2	52,8
1-82010-92	1-82210-92	1-82410-92	1-82710-92	"	"	300	"	"	250	372	545	520	640	4+2	2	54,6

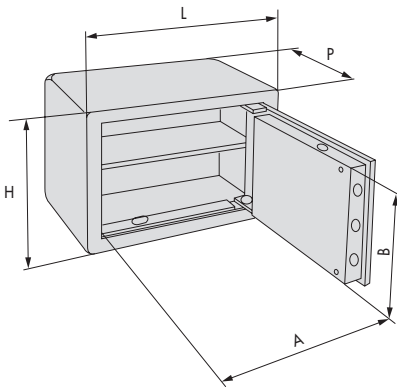

 ITEM	DIMENSIONS (mm)								Deadbolt Shelfes Weight Kg		
	Outside			Inside			A B				
	L	H	P	L	H	P	A	B			
1-8A050-23	360	240	300	350	230	245	242	165	2	1	13,2
1-8A050-34	420	300	350	410	290	295	302	225	2	1	19,6
1-8A050-43	490	360	350	480	350	295	372	285	2	1	22,5
1-82050-34 1-82250-34 1-82450-34 1-82750-34	360	240	300	350	230	245	242	165	2	1	25,5
1-82050-43 1-82250-43 1-82450-43 1-82750-43	420	300	350	410	290	295	302	225	4+2	1	38,7
1-82050-53 1-82250-53 1-82450-53 1-82750-53	490	360	350	480	350	295	372	285	4+2	1	49,5
1-82050-74 1-82250-74 1-82450-74 1-82750-74	360	490	400	350	480	345	242	415	4+2	2	54,2
1-82050-85 1-82250-85 1-82450-85 1-82750-85	420	550	450	410	540	395	302	475	4+2	2	69,4
1-82050-95 1-82250-95 1-82450-95 1-82750-95	490	620	450	480	610	395	372	545	4+2	2	84,5
1-82751-34	360	240	300	350	230	245	242	165	2	1	27,2
1-82751-74	360	490	400	350	480	345	242	415	4+2	2	52,4
1-A0G02-01	420	192	350	426	179	295			1		16
1-A0G06-01	420	192	350	426	179	295			1		16
1-A0G04-01	360	220	220	356	207	157			1		11
1-A0G08-01	360	220	220	356	207	157			1		11

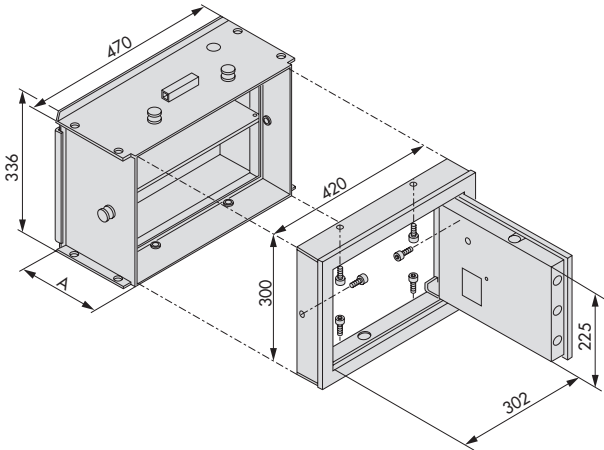

	DIMENSIONS (mm)										Deadbolt	Shelves	Weight Kg
	Esterne			Inside			Outside		Rear outside				
	L	H	P	L	H	P	A	B					
	SAFES COMPARTMENT												
1-83000-40	470	336	200	420	300	200	-	-	450	320	-	-	15,2
1-83000-41	"	"	250	"	"	250	-	-	"	"	-	-	16,3
FRONTAL													
1-83010-40	420	300	-	-	-	-	302	225	-	-	2+2	-	19,4
1-83710-40	"	"	-	-	-	-	"	"	-	-	2+2	-	19,7

